


CABLE DE FIBRA ÓPTICA

SKU: POWER-DROP-G57A1-1KM-6

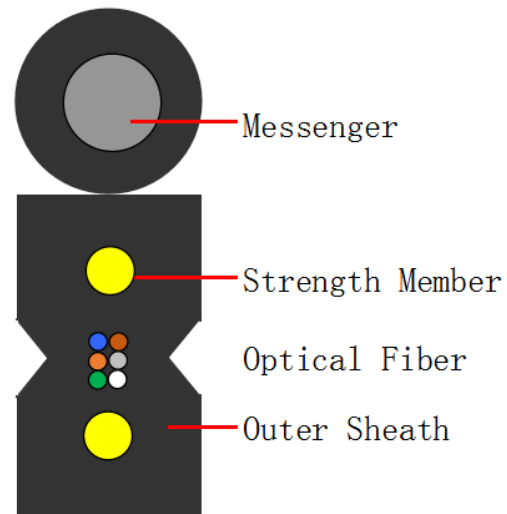

Aerial self-supporting(fig-8 Rectangular)fiber drop cable UVprotected 2Fo-2.0*5.0mm with FRP (GJYXFCH)

Technical data

No. of cable		6	
Fiber Model		G.657A1	
Messenger	Material	Steel Wire	
	Diameter (±0.03) mm	1.0	
	NO.	1	
Strength Member	Material	FRP	
	Diameter (±0.03) mm	0.5	
	NO.	2	
Outer Sheath	Material	LSZH Flame Retardant Jacket	
	Colour	Black	
Cable Diameter (mm)		$(2.0 \pm 0.2) \times (5.0 \pm 0.2)$	
Cable Weight (±2) kg/km		20.0	
Attenuation	1310nm	dB/km	0.35
	1550nm		0.21
Allowable Tensile Strength	Short Term	N	600
	Long Term		300
Allowable Crush Resistance	Short Term	N/100mm	2200
	Long Term		1000
bending radius	Without Tension		$20.0 \times \text{Cable-}\phi$
	Under Tension		$40.0 \times \text{Cable-}\phi$
Temperature range (°C)	Installation		-20~+60
	Transport&Storage		-40~+70
	Operation		-40~+70